

OBSERVATIONS ON THE SWIMMING ABILITY
OF ADULT AMERICAN SHAD (*Alosa sapidissima*)

by

Charles R. Weaver

July 1964

FISH-PASSAGE RESEARCH PROGRAM
U.S. Bureau of Commercial Fisheries
Seattle, Washington

INTRODUCTION

For several years the Bureau of Commercial Fisheries, under contract with the U.S. Army Corps of Engineers, has been investigating various factors influencing the behavior of adult salmonids in relation to fish passage problems on the Columbia River and its tributaries (Collins and Elling, 1960). In the course of these investigations, incidental observations were made on the American shad (Alosa sapidissima) which utilized the same waterways as the salmonids. Observations presented in this report were made during the period of July 18 to 28, 1961.

The objective of the primary study on salmonids was to gain further knowledge of the maximum water velocities that could be negotiated. The presence of shad during the experiments, however, also made it possible to obtain information on the swimming ability of this species. Specifically, this report covers the channel distances negotiated by the American shad in water velocities ranging from 11.4 to 13.6 feet per second.

Although velocities of this magnitude may not often be encountered by American shad ascending the rivers and fishways at existing dams, a knowledge of their swimming ability in these higher velocities is meaningful. The continuing effort to develop more efficient and economical fish passage facilities in the Columbia River drainage requires a thorough knowledge of the physical requirements and swimming abilities of the various species of fish involved.

Even though American shad in the Columbia River are not at present regarded with the same esteem as salmon and trout, large numbers of these fish ascend this drainage annually, and they must be considered in the design and operation of fish passage facilities that may be utilized by them. By the same token, information on the swimming abilities of American shad may be of use on the East Coast, where efforts are currently underway to rehabilitate shad runs by providing passage to production areas that have been lost due to dams or other resource developments.

METHODS AND MATERIALS

The observations were made at the Fisheries-Engineering Research Laboratory at Bonneville Dam on the Columbia River. The laboratory is basically a large tank approximately 181 feet long by 24 feet wide located on the right bank of the river adjacent to the Washington shore fish ladder. The fish enter and pass

through the laboratory via short fish ladders connected with the Washington shore fish ladder. Passage is volitional, and the fish are not handled at any time.

The arrangement of the laboratory during these experiments was the same as that employed in earlier velocity experiments conducted in 1957 (Weaver, 1963). Testing facilities for fish consisted of a channel 85 feet long by 5 feet wide (fig. 1). The velocity of the flow in the channel was regulated by the slope of the channel floor and the head on the channel. Four different velocity conditions were tested. Average velocities during the tests, based upon measurements taken at the downstream end of the channel, were 11.4, 12.6, 13.2, and 13.6 feet per second. More extensive measurements made within the channel after the tests were completed revealed that velocities were generally somewhat lower (up to 1 foot per second) in the upper reaches of the channel. Depths of water in the channel were 2.1, 1.8, 1.8, and 1.6 feet respectively for the above velocity conditions.

Normally, tests were made in the channel by releasing individual fish into the introductory area (fig. 1). As they moved upstream through the channel, the fish were followed by observers stationed on walkways above. Although some of the American shad observed during these experiments entered the laboratory in this manner, a larger number entered by drifting downstream from the main fish ladder through the exit ladder of the laboratory. After entering in this fashion, the shad continued downstream through the test channel, and accumulated in the introductory area. Even though there were areas where these fish could remain in relatively calm water, they were continually entering the test channel and attempting to swim back upstream. The observations of swimming ability presented here consist of the distances which the shad attained in these attempts to negotiate the channel.

The water velocity in the channel was reduced at the end of each day to give shad, accumulating in the introductory pool, the opportunity to pass through the channel and leave the laboratory. Although many shad were noted swimming up the channel when the flow was reduced, they seemed to have no great desire to leave the laboratory and return to the Washington shore ladder. Each morning shad were present in the flow introduction pool (upstream end of the channel). As soon as the velocity was increased, they began falling back downstream through the channel. It is believed that some of these fish remained in the laboratory for several days and could have contributed to daily observations.

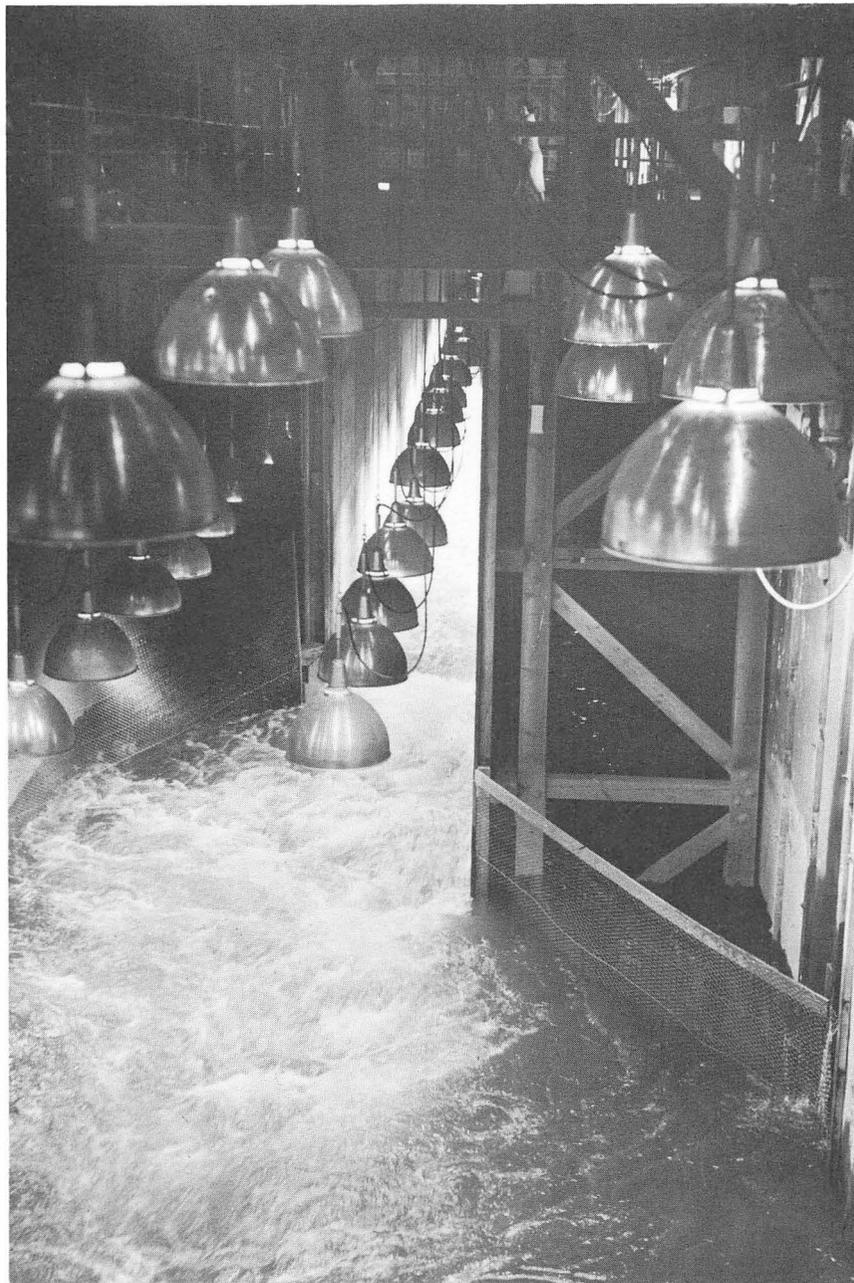


Figure 1.--View of introductory area and channel during the 11.4-foot-per-second velocity tests.

The upstream and downstream movement of shad in the laboratory was similar to their general behavior in the Washington shore ladder during the same period. Although large numbers of shad could be observed in the ladder pools and considerable to-and-fro movement was evident in the fishway, few shad were being counted out of the ladder at the upstream end. It is believed, however, that even though many shad did not continue their movement upstream through the ladder, this phenomenon was due to something other than a lack of ability to negotiate the ascent. Similar upstream-downstream passage was reported by Talbot (1953) and also noted by Bell & Holmes (1962)^{1/} while studying the passage of shad in the Oregon shore fish ladder at Bonneville Dam.

The American shad observed in this study were from the latter part of the run, and it is possible that some had reached sexual maturity and were preparing to spawn in the ladder pools. The peak of the migration had occurred during the first week of July. At this time, counts at the upstream end of the Washington shore ladder exceeded 10,000 shad per day. When these observations on shad were in progress, counts averaged less than 200 fish per day.

RESULTS AND CONCLUSIONS

The distances attained by shad in their attempts to ascend the channel varied inversely with the velocity of the flow (fig. 2). Mean distances attained by groups of fish tested in the four velocities ranged from 11.7 feet in the 13.6-foot-per-second velocity to 30.1 feet in the 11.4-f.p.s. velocity (table 1). None of the shad negotiated the entire 85-foot channel. Maximum distances attained ranged from 20 feet at 13.6 f.p.s. to 65 feet at 11.4 f.p.s.

Considering the possibility that many of these observations may have been made when the shad were in a weakened or declining physical condition (from repeated exhaustive swimming efforts or factors associated with spawning), performance levels shown may be somewhat less than would have occurred under more

^{1/} Bell, Milo C. and Harlan B. Holmes. Engineering and biological study of proposed fish-passage at dams on Susquehanna River, Pennsylvania. Report to Pennsylvania Fish Commission, 125 p. Processed (1962).

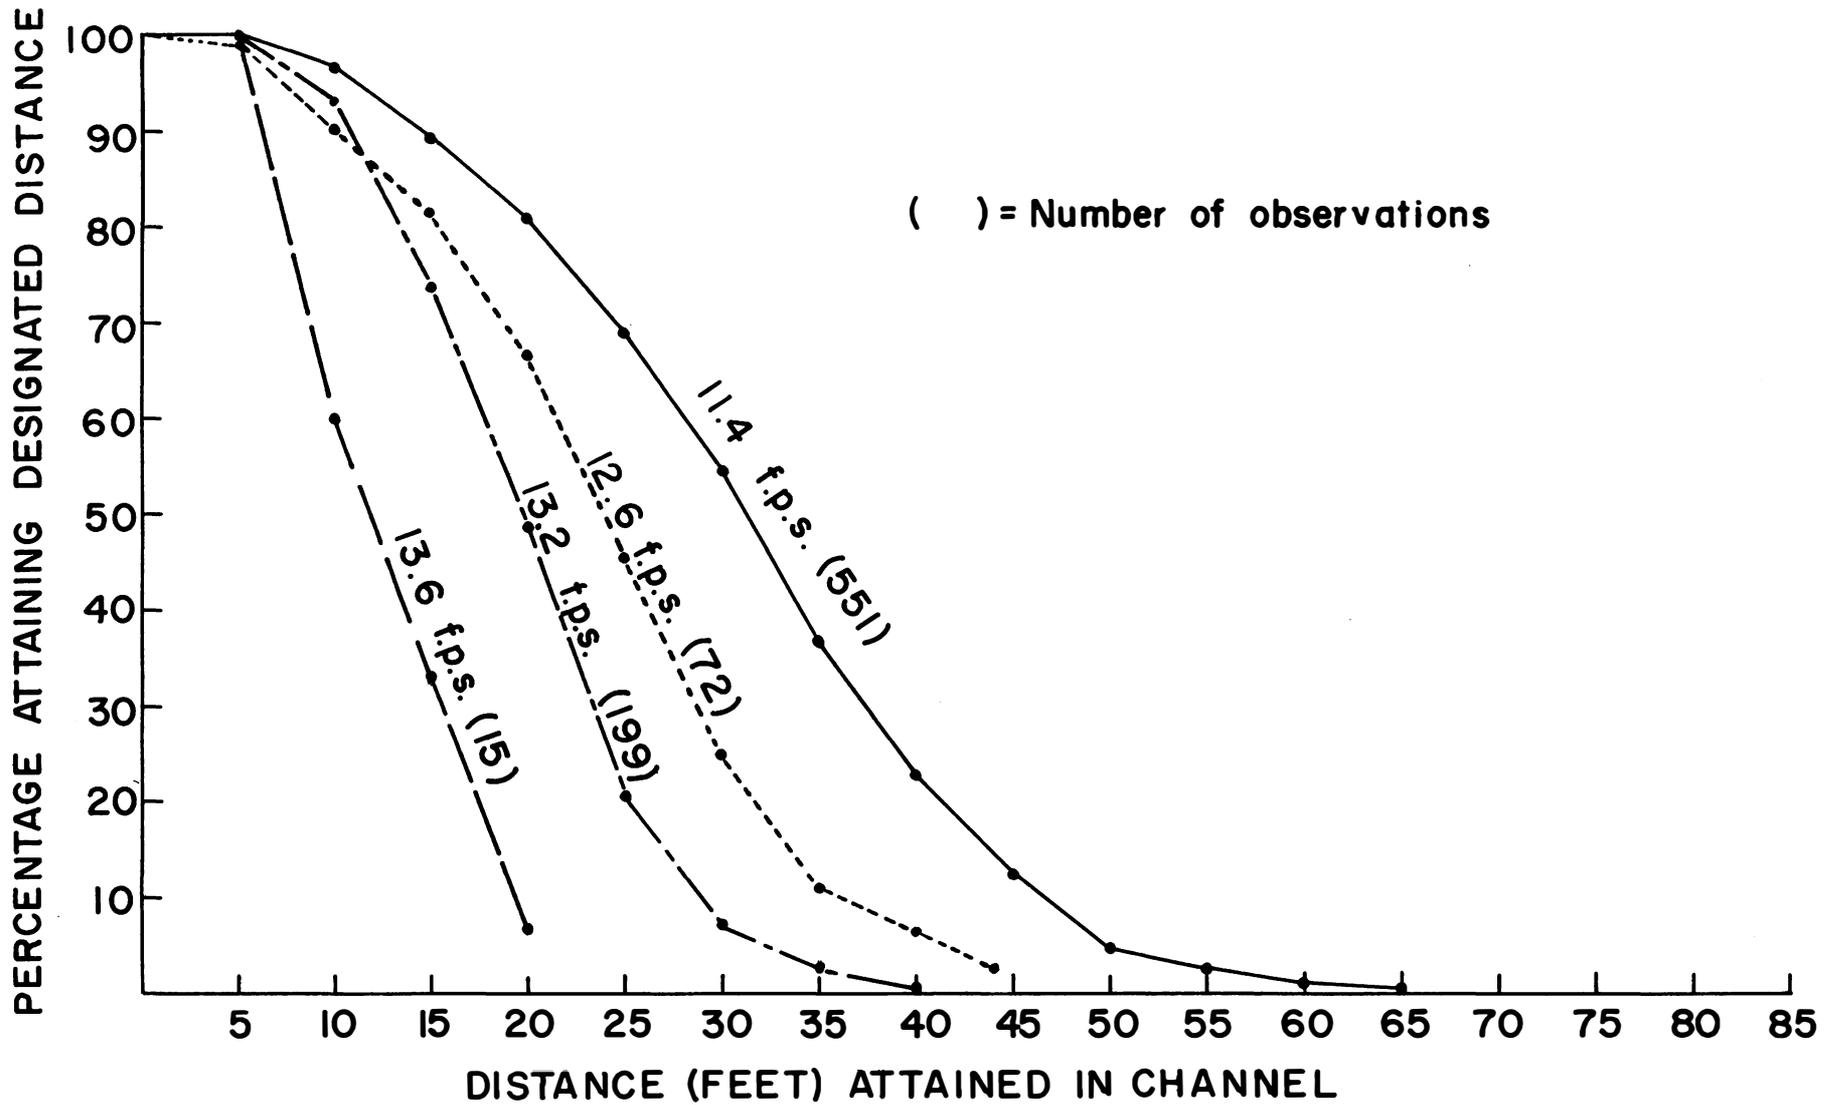


Figure 2.--Performance of shad in flows of 11.4, 12.6, 13.2, and 13.6 feet per second. Data are plotted at 5-foot intervals.

favorable circumstances. Although shad appear to be capable of swimming modest distances in relatively high velocities, even the lowest of the four velocities tested might present a serious barrier for some shad if a passage of more than a few feet were required.

Table 1.--Distances attained by shad in flows of 11.4, 12.6, 13.2, and 13.6 feet per second

Water velocity (f.p.s.)	Date	Water temperature (°F.)	Number of observations	Distance attained	
				Mean (Feet)	Maximum (Feet)
11.4	July 21	70	62	27.2	54
	22	70	193	29.2	59
	23	70	160	32.0	65
	24	69	106	30.5	63
	25	69	30	29.9	60
	Total		551	30.1	65
12.6	25	69	18	19.1	41
	26	69	29	24.8	43
	27	69	25	24.8	44
	Total		72	23.4	44
13.2	18	70	72	18.8	35
	19	70	127	18.8	40
	Total		199	18.8	40
13.6	28	69	15	11.7	20

LITERATURE CITED

Collins, Gerald B. and Carl H. Elling

1960. Fishway Research at the Fisheries-Engineering Research Laboratory. U.S. Fish and Wildlife Service, Circular No. 98, 17 p.

Talbot, G. B.

1953. Passage of shad at the Bonneville fishways. U.S. Fish and Wildlife Service, Special Scientific Report--Fisheries No. 94, 30 p.

Weaver, Charles R.

1963. Influence of water velocity upon orientation and performance of adult migrating salmonids. U.S. Fish and Wildlife Service, Fishery Bulletin, vol. 63, no. 1, p. 97-121.